

Dependable by design.™



## LARGE CAPACITY ASME HOUSINGS

### LARGE CAPACITY FILTER GRADES

#### HB = HIGH EFFICIENCY COALESCING W/ PLEATED PREFILTER

- » General filtration 0.01 micron
- » 99.9999% Efficient
- » Max. oil carryover 0.008 PPM w/w
- » Nominal pressure drop 1.0 PSID

#### P = PARTICULATE FILTRATION

- » 99.99% Efficiency
- » Particle removal down to 1.0 micron
- » Nominal pressure drop 0.75 PSID


#### M = MIST ELIMINATOR COALESCING FILTER

- » General filtration 0.01 micron
- » 99.97% efficient
- » Max. oil carryover 0.09 PPM w/w
- » Nominal pressure drop 0.5 PSID

#### A = ACTIVATED CARBON ADSORBER

- » High purity extended surface area activated carbon removes hydrocarbon mist and vapor.
- » Max. Oil Carryover 0.002 PPM w/w Nominal Pressure Drop 1.2 PSID

Model Number	Capacity in SCFM @		In/Out	Housing Type
	120 PSIG	100 PSIG		
SPA-T161FG-HB	2353	2000	4" Flg	Inline T-Type
SPA-T241FG-HB	3529	3000	6" Flg	Inline T-Type
SPA-F161FG-HB	2353	2000	4" Flg	Floor Standing
SPA-F162FG-HB	2706	2300	4" Flg	Floor Standing
SPA-F241FG-HB	3529	3000	6" Flg	Floor Standing
SPA-F242FG-HB	5294	4500	6" Flg	Floor Standing
SPA-F321FG-HB	7059	6000	8" Flg	Floor Standing
SPA-F401FG-HB	12353	10500	10" Flg	Floor Standing
SPA-T161FG-U	2353	2000	4" Flg	Inline T-Type
SPA-T241FG-U	3529	3000	6" Flg	Inline T-Type
SPA-F161FG-U	2353	2000	4" Flg	Floor Standing
SPA-F162FG-U	2706	2300	6" Flg	Floor Standing
SPA-F241FG-U	3529	3000	6" Flg	Floor Standing
SPA-F242FG-U	5294	4500	6" Flg	Floor Standing
SPA-F321FG-U	7059	6000	8" Flg	Floor Standing
SPA-F401FG-U	12353	10500	10" Flg	Floor Standing
SPA-T161FG-P	2353	2000	4" Flg	Inline T-Type
SPA-T241FG-P	3529	3000	6" Flg	Inline T-Type
SPA-F161FG-P	2353	2000	4" Flg	Floor Standing
SPA-F162FG-P	2706	2300	6" Flg	Floor Standing
SPA-F241FG-P	3529	3000	6" Flg	Floor Standing
SPA-F242FG-P	5294	4500	6" Flg	Floor Standing
SPA-F321FG-P	7059	6000	8" Flg	Floor Standing
SPA-F401FG-P	12353	10500	10" Flg	Floor Standing
SPA-T161FG-M	2706	2300	4" Flg	Inline T-Type
SPA-T241FG-M	4000	3400	6" Flg	Inline T-Type
SPA-F161FG-M	2706	2300	4" Flg	Floor Standing
SPA-F241FG-M	4000	3400	6" Flg	Floor Standing
SPA-F242FG-M	6176	5250	6" Flg	Floor Standing
SPA-F321FG-M	8235	7000	8" Flg	Floor Standing
SPA-F401FG-M	14412	12250	10" Flg	Floor Standing

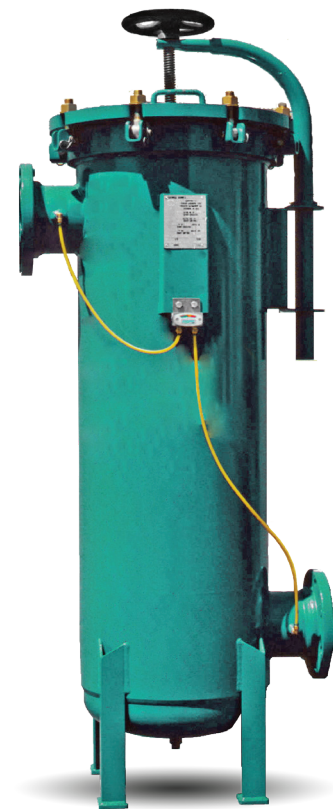

#### Notes:

Capacity is in SCFM @ Specified pressure & 100°F  
Maximum Pressure: 150 PSIG @ 225°F  
Materials: Carbon Steel Shell  
Seals: Inorganic Gasket  
Housings Meet ASME Section VIII Division 1  
Dimensions are in Inches